



上海松铭传动机械有限公司

SHANGHAI SONGMING TRANSMISSION MACHINERY CO.,LTD









公司简介 | Company brief introduction

上海松铭传动机械有限公司是一家研究、设计、销售机械传动类产品的企业，供应产品有：WS/WSD/WSS/WSP万向节、SWP/SWC万向联轴器、ML梅花弹性联轴器、XL/XLD星型弹性联轴器、DJM/JMII/SJM/JMIIJ/ZJM弹性膜片联轴器、TL弹性柱销套联轴器、HL弹性柱销联轴器、ZL柱销齿式联轴器、制动轮式联轴器、铝合金联轴器、UL/LLA/LLB轮胎联轴器、SL十字滑块联轴器，KC/GL链条联轴器、JS蛇型弹簧联轴器、鼓型齿联轴器、凸缘联轴器、JQ夹壳联轴器、WH/SL滑块联轴器、联轴器配件（弹性体/轮胎体/铝合金外罩壳/联轴器膜片组/联轴器弹簧等）、Z型胀紧联结套及SPA/SPB/SPC/SPZ锥套皮带轮等产品，并承接非标传动零部件的定制加工。

产品咨询订购电话：18621008099

联轴器系列

					
YL	JQ	ML	MLL	MLS	XL
					
HL	HLL	TL	ZL	UL	LLA
					
DJM	SJM	ZJM	NL	CL	GICL
					
GICLZ	GIICL	NGCL	WGC	WGP	WGT
					
WH	SL	KC	GL	JS	WSDWS
					
WSS	SWC	SWC-WD	SWP	CD-1	CD-2

联轴器系列




常用联轴器孔和键槽形式


Mode of hole and key way form of normal couplings

◇ 摘自GB/T3852-1997 《联轴器轴孔和联结型式及尺寸》


The model and marks from GB/T3852-1997 《sizes mode of hole and connecting of coupling》




1、Y型长圆柱形轴孔
(限用于长圆柱形轴伸电机端)
1. Y type long ring shaft hole
(Only apply for electrical machine
ends of long open ring shaft)




2、J型有沉孔的短圆柱形轴孔
(推荐选用)
2. J type cylindrical shaft hole
with counterbore(commending)




3、J1型无沉孔的短圆柱形轴孔
(推荐选用)
3. J1 type short cylindrical shaft
hole without counterbore
(commending)




4、Z型有沉孔的圆锥形轴孔
4. Z type coniform shaft hole with counterbore




5、Z1型无沉孔的圆锥形轴孔
5. Z1 type coniform shaft hole without counterbore

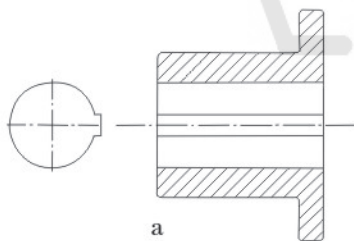


a

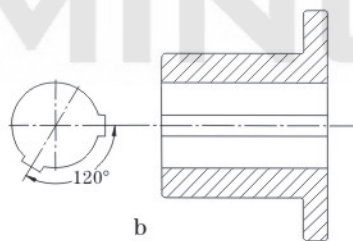


b

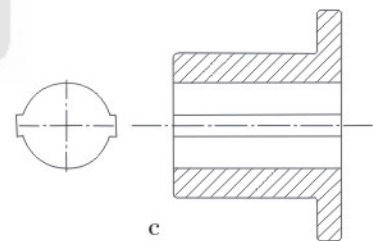

c

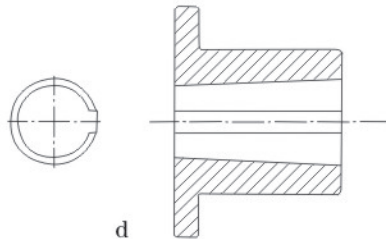

d

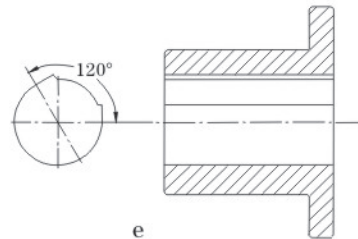

e


键槽形式keyway modes

(a)A型平键单键槽； (b)B型120° 布置平键双键槽； (C)B1型布置平键双键槽； (d)C型圆锥形孔平键单键槽； (e)D型普通切向键键槽。

a. A type even single keyway b. B type even double keyway with 120° display C. B1 type even double keyway
d. C type even single keyway with conic hole e. D type normal keyway with tangential key

WH型滑块联轴器 WH Type Oldham coupling

本联轴器适用于传递转矩较小的场合，具有一定补偿两轴相对偏移量、减震和缓冲性能。工作温度为-20~+70℃，传递转矩为16~5000N·m。

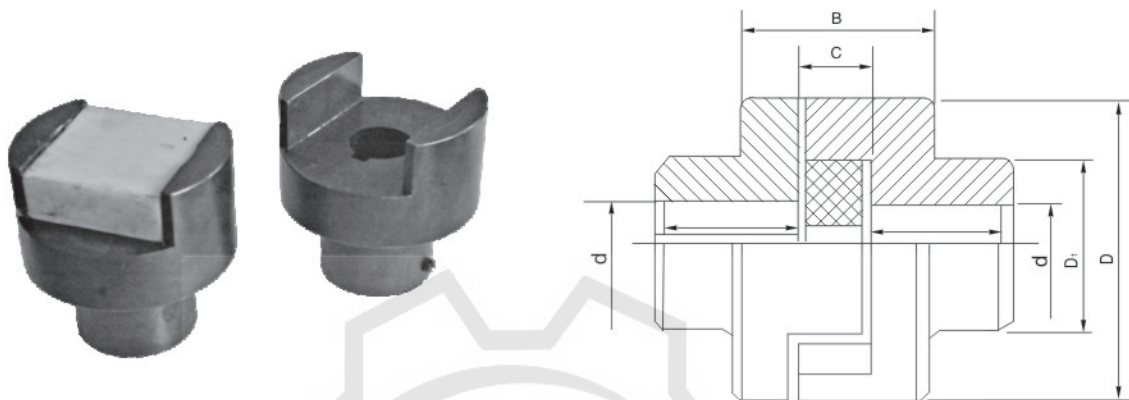

◇WH型联轴器主要参数与尺寸
WH Type coupling key parameter

YH Type coupling key parameter

mm

型号 Type	公称转矩 T _n N·m	许用转速 [n] r/min	轴孔直径 d	轴 孔 长 度		尺 寸				重量 kg
				Y型	J ₁ 型	D	D ₁	B	C	
				L	L					
WH1	16	10000	10~14	25~32	22~27	40	30	52	17	0.6
WH2	31.5	8200	12~18	32~42	27~30	50	32	56	22	1.5
WH3	63	7000	18~22	42~52	30~38	70	40	60	22	1.8
WH4	160	5700	20~28	52~62	38~44	80	50	64	22	2.5
WH5	280	4700	25~32	62~82	44~60	100	70	75	27	5.8
WH6	500	3800	30~45	82~112	60~84	120	80	90	37	9.5
WH7	900	3200	40~55	112	84	150	100	120	42	25
WH8	1800	2400	50~70	112~140	84~107	190	120	150	52	55
WH9	3550	1800	65~85	142~172	107~132	250	150	180	62	85
WH10	5000	1500	80~100	172~212	132~167	330	190	180	62	120